



PRIME

BRIDGE SAWS

Designed and made in Italy



CONTROL BOARD

The control board includes:

- Switch with release coil.
- Overheat protection with manual reset in the event of the disk jamming.
- Red light for net connection.
- Green light for machine on function.
- Laser instrument for the maximum cutting precision.

KIT WHEELS

The wheels can be fixed to the legs by means of eyebolts.

The machine can be easily moved if lightly lifted up by the handles.

STORAGE

Build to reduce at the maximum the encumbrance during the carriage and above all the storage space.

Article	PRIME 55		PRIME 85		PRIME 100		PRIME 120		PRIME 150		PRIME 200	
	Art. 9055	Art. 90551	Art. 9085	Art. 90851	Art. 9100	Art. 91001	Art. 9120	Art. 91201	Art. 9150	Art. 91501	Art. 9200	Art. 92001
CUTTING DISK Ø350 (int ø25,4mm.)	Optional											
ENGINE	Single phase 115V 50Hz 3Hp/2,2Kw											
ROTATION SPEED	2800 rpm.											
AMPEROMETRICAL PROTECTION	13 A											
MAX CUTTING LENGTH	550 mm		850 mm		1000 mm		1200 mm		1500 mm		2000 mm	
MAX CUTTING DEPTH AT 90°	110 mm											
MAX CUTTING DEPTH WITH 2 RUNS	180 mm											
MAX CUTTING DEPTH AT 45°	80 mm											
WATER RECYCLING PUMP TYPE	S3 standard											
KIT WHEELS	Optional	Standard										
LASER INSTRUMENT	Optional	Standard										
DIMENSION MACHINE IN SERVICE	1260x770x h. 1305 mm		1560x770x h. 1305 mm		1720x770x h. 1305 mm		1920x770x h. 1305 mm		2220x770x h. 1305 mm		2720x770x h. 1305 mm	
DIMENSION MACHINE IN STOCK	720x1300x h. 1000 mm		720x1600x h. 1000 mm		720x1750x h. 1000 mm		720x1950x h. 1000 mm		720x2250x h. 1000 mm		720x2750x h. 1000 mm	
NET WEIGHT	75 Kg		80 Kg		92 Kg		86 Kg		111 Kg		127 Kg	

BATTIPAV

MACCHINE PER EDILIZIA | MACHINES FOR BUILDING

Z. i. 2 - Via Cavatorta, 6/1 | 48033 Cotignola (Ra) | ITALY
 Tel. +39 0545 40004 | Fax +39 0545 41724
 www.battipav.com | sales@battipav.com


AUTHORIZED DEALER:



March 2017

APPLICATION

Built to cut bricks, natural-stones, concrete blocks, granite and marble slabs.

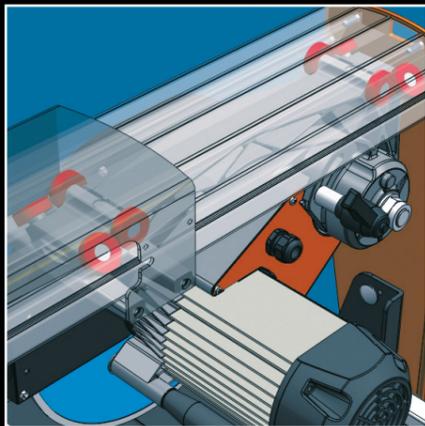

The carriage engine group slides with 8 ball-bearings on interchangeable stainless steel track. So doing the sliding is very fast and precise.




A graduated scale measures the adjustment of the cutting depth by means the locking of the tilting of the engine group.




The **CUTTING PROGRESS SYSTEM** with **HANDWHEEL** adjusts the movement of the cutting head forward or behind.



Position 45° angle cuts.

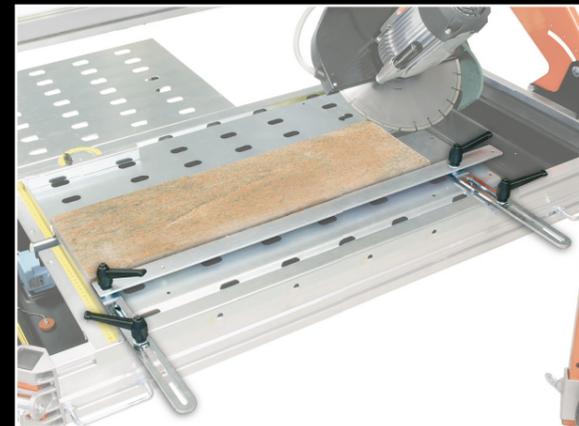

SIDE BAR SUPPORT
Made to have the top precision during the execution of straight and angled cuts on slabs of large size. Adjustable angle-shot cut.
Optional for the models: 85, 100, 120, 150 and 200

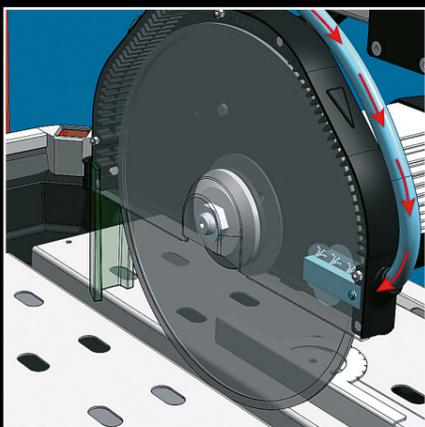

Spray system
DISK'S LUBRICATION

wdec
WATER DECONTAMINATING SYSTEM



TT
POWER



ORIGINAL RECYCLING PUMP

FastLEG
LEG FASTENING SYSTEM

TT YouTube
OFFICIAL CHANNEL
www.youtube.com/battipav